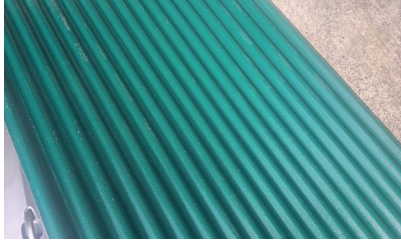
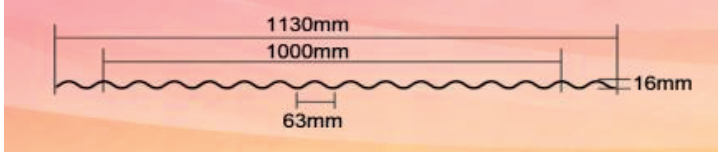


PANA ROOF

 www.polycenter.cr
 info@polycenter.cr
 4001-5250
  8584-5454

ASAPVC ROOF TILE

WARRANTY	25YEARS LIFE WARRANTY, 10 YEARS COLOR WARRANTY	
PROFILE	C1130-63-16	
WIDTH (MM)	Overall width:1130MM	
	Effective width:1000MM	
THICKNESS(MM)	2.0MM	
WEIGHT	4.1KG/M2	
Distance of Purlines	60CM	
SPECIFICATION DRAWING	 	
FEATURES	1. Long life span,at least 5times of Iron tile. Rich color and at least 10years not fade.	
	2. Sound insulation ,heat insulation & anti corrosion	
	3. Water resistance: 100%;	
	4. Impact resistance and low temperature resistance;	
	5. Fire resistance: Self-extinguish off fire;	
	6. Light weight,easy for transportation	
	7 .Small Thermal expansivity;	
	8. Easy to install, maintenance, and clean. 4 people one day can install 600+sqm	
APPLICATION	Widely used in house roof ,pavilion roof Home.high-grade plants; steel factories; warehouse; farm market; market access; sheds and other hight-end roofing materials. Especially in corrosive chemical plants, smelters, ceramic plants, soy sauce factory, chemical plants, printing and dyeing plant, organic solvent factory, acid, alkali and other corrosive plant etc.	
MATERIAL	using today's advanced twofold extrusion technology for one-off processing with a separate function in each layer: The surface material adopts the ASA high weather resistant engineering plastic .ASA is a ternary polymer made up of acrylonitrile, styrene and acrylate with outstanding durability, UV resistance and chemical corrosion resistance, which ensures the bright color and luster and superb durability and chemical corrosion resistance of the product; the sublayer material is the extremely tough polyvinyl chloride resin (PVC), which ensures strength while increasing rigidity.the 3rd layer is special resin for heat insulation ,bottom layer is super resin ,make it strong and more bright	